



# SA Straight Square Aluminum Poles

## APPLICATION

Straight square "SA" poles are suitable for street, parking lot, residential and area lighting.

## SPECIFICATION

Straight square aluminum poles can be supplied in 4", 5" or 6" diameter sizes and are made of 6063 aluminum alloy tube heat treated to T6 after welding. All sizes are available in .125", .188" and .250" wall thicknesses.


## EQUIPMENT

Poles are supplied complete with grounding lug, hand hole and cover, four shims, full base covers are optional and removable pole cap, (except with tenon option). All poles are supplied with a 2 1/2" x 5" hand hole and can be drilled to accept luminaires (customer must supply drilling template or drawing with the order).


The anchor bolt kit which includes one foundation template\*, four anchor bolts, eight washers and eight nuts is to be ordered separately and can be pre-shipped by indicating this requirement on the order. \*NOTE: On large orders one template is supplied for every five poles ordered.

## FINISH

The standard finish is dark bronze baked enamel paint. Other colors are available to match luminaires. Consult your representative for details.

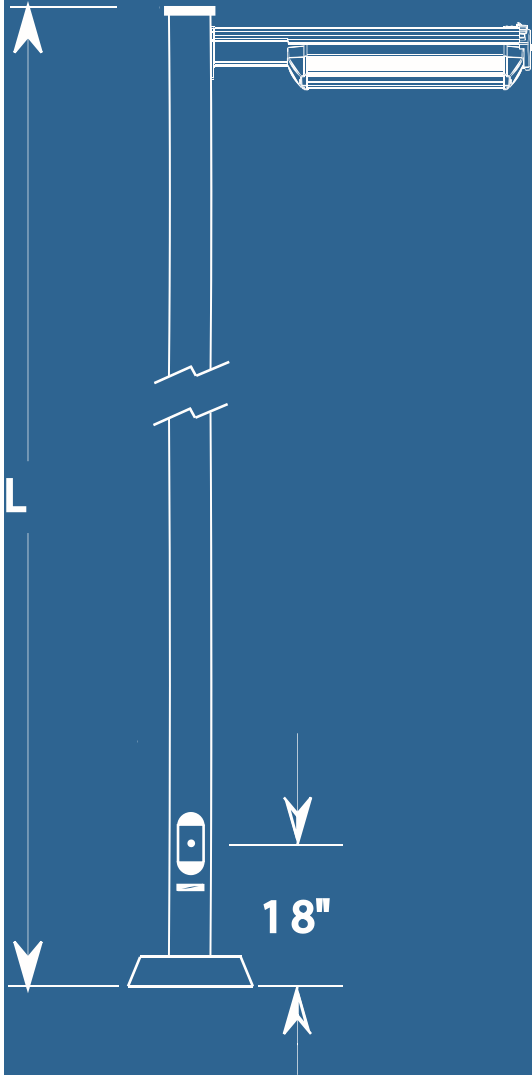

## ORDERING INFORMATION



### 1- Pole Style

SA = STRAIGHT SQUARE

### 3- Pole Size

400 = 4"  
500 = 5"  
600 = 6"

### 6- Base Type

AB = ANCHOR BOLT BASE

### 2- Mounting Height

10 = 10'  
12 = 12'  
15 = 15'  
18 = 18'  
20 = 20'  
25 = 25'  
30 = 30'

### 4- Thickness

A = .125"  
C = .188"  
E = .250"

### 7- Mounting Type

1 = 2 3/8" TENON 4.25" LONG.  
2 = 2 7/8" TENON 4.25" LONG.  
D = DRILLING DETAIL \*

\* NOTE: Drilling pattern must be supplied with order when drilling is required

### 5- Color Option

- = RAW ALUMINUM  
1 = BLACK  
2 = LIGHT GREY  
3 = BRONZE

Elumen Lighting Networks  
7451 Transcanada Hwy  
Suite 100  
St-Laurent, Québec  
H4T 1T3

T. 514-876-1010  
F. 514-876-1010

www.elumenlighting.com

Area Lighting

evolution • efficiency • energy • economy • environment



# SA Straight Square Aluminum Poles



## POLE SPECIFICATION GUIDE

Length L Feet	CATALOG NUMBER	POLE SIZE Inches	WALL THICKNESS Inches	ANCHORBASE DETAIL						EPA				
				CATALOG NUMBER	A Inches	BC Inches	S Inches	Bolts Inches	E Inches	80 mph	90 mph	100 mph	110 mph	120 mph
10	SA10-400C-AB	4	0.188	ABK 85-0 75	6	8 <sup>1</sup> / <sub>2</sub>	8	3/4 x 24	2	18.4	14.2	11.0	8.7	6.9
12	SA12-400C-AB	4	0.188							14.5	10.9	8.2	6.2	4.7
15	SA15-400C-AB	4	0.188							10.2	7.2	5.0	3.3	2.0
18	SA18-400C-AB	4	0.188							6.8	4.2	2.2	0.7	-
20	SA20-400C-AB	4	0.188							4.7	2.3	0.4	-	-
15	SA15-500C-AB	5	0.188	ABK105-1	7 7/8	10 <sup>1</sup> / <sub>2</sub>	11 <sup>1</sup> / <sub>2</sub>	1 x 30	2 1/2	17.7	13.0	9.5	6.9	4.8
18	SA18-500C-AB	5	0.188							12.6	8.6	5.6	3.3	1.5
20	SA20-500C-AB	5	0.188							9.6	5.9	3.1	1.0	-
25	SA25-500C-AB	5	0.188							3.2	-	-	-	-
25	SA25-500E-AB	5	0.250							7.5	3.6	0.7	-	-
20	SA20-600C-AB	6	0.188	ABK 13-1	9 3/16	13	12 3/4	1 x 30	2 3/4	15.9	10.6	6.8	4.1	2.3
20	SA20-600E-AB	6	0.250							23.5	16.8	11.8	8.4	5.9
25	SA25-600C-AB	6	0.188							7.4	3.0	1.2	-	-
25	SA25-600E-AB	6	0.250							13.5	8.1	4.0	2.0	-
30	SA30-600E-AB	6	0.250							5.8	0.9	-	-	-

All EPAs are calculated with a total weight of 150 lbs. For other weights, please contact factory.

